



Low Pressure Type Pressure Reducing Valve

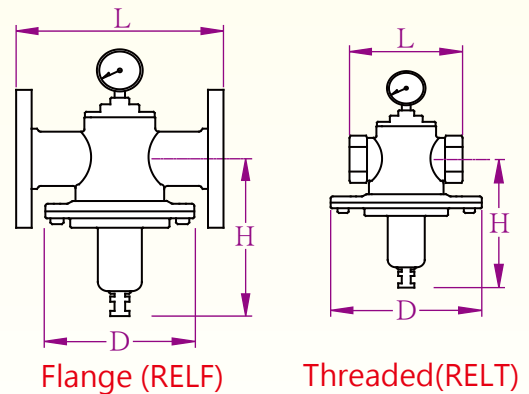

- ★ Pressure Adjusting Range :
0.2 kgf/cm² ~ 1.5 kgf/cm²
- ★ Micro pressure type 0.02 k gf/cm²
Can be order .
- ★ Applied Temperature : -15 °C~ 80 °C
- ★ Applied Condition : Water , Air .
- ★ Special order can be arranged for higher pressure adjustment range.
- ▼ Maximum Working Pressure : 10 kgf/cm²
- ▼ Body Testing Pressure : 16 kgf/cm²
- ★ The pressure gauge display outlet pressure .

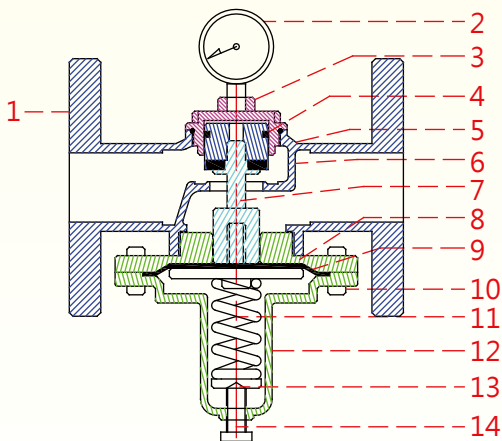

No.	Part Name	Material
1	Main Body	Stainless Steel #316
2	Pressure Gauge	-----
3	Upper Cover	Stainless Steel #316
4	U-ring	Viton · NBR
5	Piston	Stainless Steel #316
6	Sealing Spacer	Viton · NBR
7	Shaft	Stainless Steel #316
8	Diaphragm Disk	Stainless Steel #316
9	Diaphragm	Viton · EPDM
10	Fixed Bolt	Stainless Steel #304
11	Spring	Spring steel
12	Lower Cover	Stainless Steel #316
13	Washer	Brass
14	Adjusting Stem	Stainless Steel #304

Model : RELT (Threaded)

尺寸	H	L	D
1/2"	110	70	105
3/4"	125	85	105
1"	125	90	105
1 1/2"	155	115	145
2"	155	120	145

Model : RELF (Flange)

尺寸	H	L	D
1/2"	110	150	----
3/4"	125	150	----
1"	125	150	----
1 1/2"	155	190	----
2"	155	190	----
2 1/2"	250	210	250

Unit : mm